

FSDC-500-1000-30

0.5~1GHz, 30W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~1GHz
Insertion Loss:	0.4dB max.
Coupling:	10, 20, 30dB
Directivity:	20dB min.
VSWR:	1.3 max.
Average Power:	30W
Impedance:	50Ω

Mechanical


Size ^{*1} :	120*26*14mm 4.724*1.024*0.551in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-30~+70°C
Non-operating Temperature:	-40~+80°C

Outline Drawings

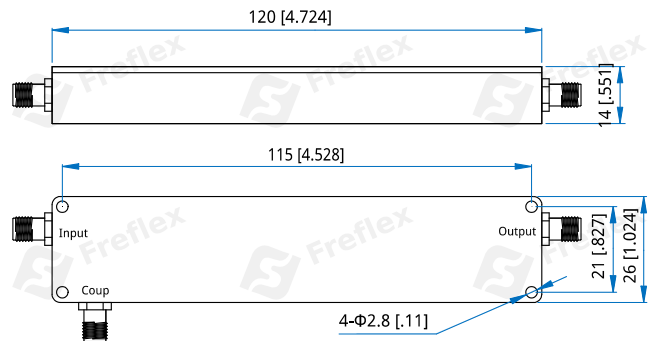

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDC-500-1000-30-X-Y

X: Coupling: 10, 20, 30

Y: Connector type

Connector naming rules:

S - SMA Female

Examples:

To order a single directional coupler, 0.5~1GHz, 30W, 10dB, SMA, specify FSDC-500-1000-30-10-S.

Customization is available upon request.