

FSDC-5600-5800-K1-30-N

5.6~5.8GHz, 100W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	5.6~5.8GHz
Insertion Loss:	0.4dB max.
Coupling:	30±1dB
Directivity:	10dB min.
VSWR (Voltage):	1.5 max.
Average Power:	100W
Impedance:	50Ω

Mechanical

Size ^{*1} :	55*25*25mm 2.165*0.984*0.984in
Connectors:	N female
Mounting:	3-Φ2.8mm

[1] Exclude connectors.


Environmental

Operating Temperature: -40~+85°C

How To Order

FSDC-5600-5800-K1-30-N

Outline Drawings

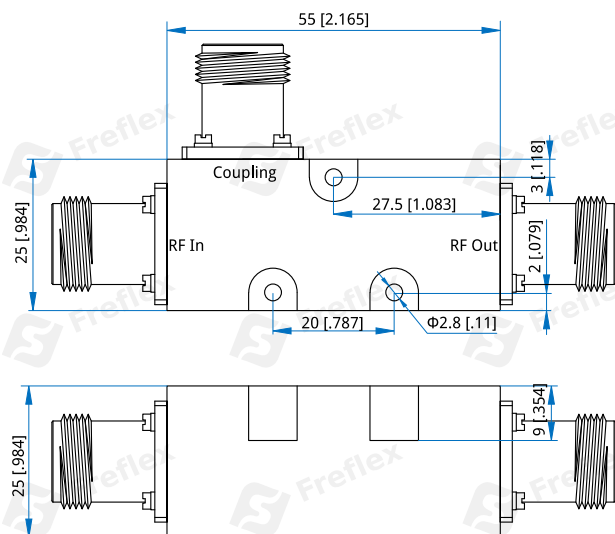

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in].

Customization is available upon request.