

## FSDC-700-8000-K6

0.7~8GHz, 600W

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.7~8GHz
Directivity:	14dB min.
Impedance:	50Ω
Average Power:	600W max.
Peak Power:	3000W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
30±0.8	0.5	1.4	1
40±0.8	0.5	1.4	1


### Mechanical

RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-M3*5

### Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

### Outline Drawings

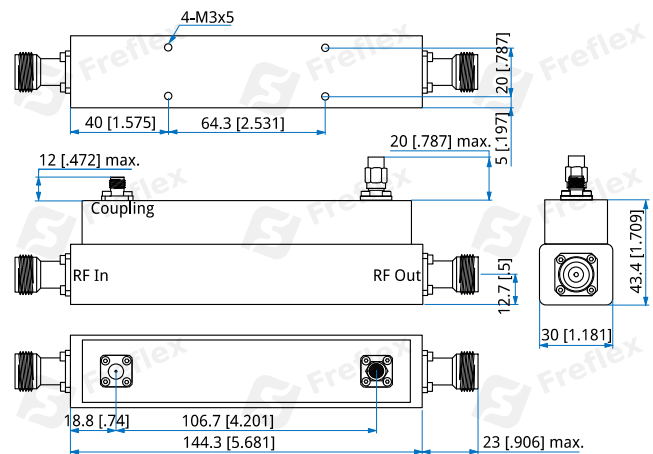

Unit: mm [in]

Tolerance: .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

### How To Order

**FSDC-700-8000-K6-X-Y**

X: Coupling (30, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a single directional coupler, 0.7~8GHz, 600W, 30dB, N female & SMA female, specify FSDC-700-8000-K6-30-NS.

Customization is available upon request.