

FSDCC-14500-22000

14.5~22GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	14.5~22GHz
Coupling:	40±0.7, 50±0.7dB
VSWR (Mainline):	1.05 max.
VSWR (Coupline):	1.1 max.
Directivity:	18dB min.
Power Handling:	0.12MW

Mechanical

Interface:	WR-51 (BJ180)
Flange:	FBP180
Material:	Aluminium
Finish:	Pickling passivation
Coating:	Black paint

Environmental

Operating Temperature:	-55~+85°C
Non-Operating Temperature:	-60~+90°C

How To Order

FSDCC-14500-22000-W-X-Y-Z

W: Coupling:

40, 50 - Outline A

X: Coupling Connector type

Y: Material

Z : Flange type

Connector naming rules:

51 - WR-51 (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


1 - FBP (Outline A)

Examples:

To order a Single Directional Crossguide Coupler, 14.5~22GHz, 50dB, WR-51, Aluminium, FBP180, specify FSDCC-14500-22000-50-51-A-1.

Customization is available upon request.

Outline Drawings

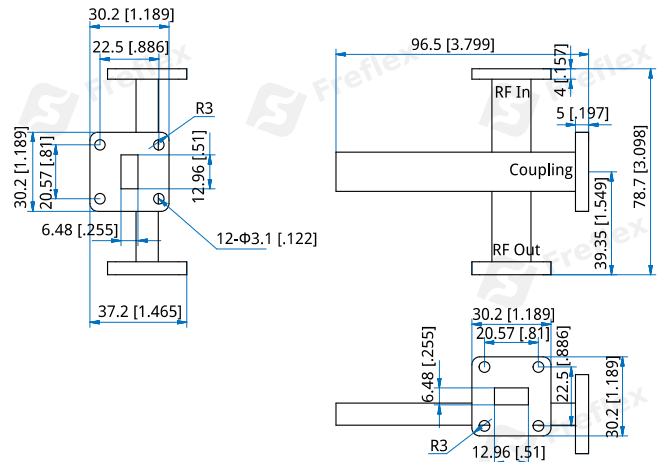

Outline A

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]