

FWTS75-20

WR-75, 20W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 9.84~15GHz
Average Power: 20W
VSWR: 1.2max.



Mechanical

Waveguide Size: WR-75 (BJ120)
Flange: FBP120

Environmental

Temperature: -55~+125°C

Outline Drawings

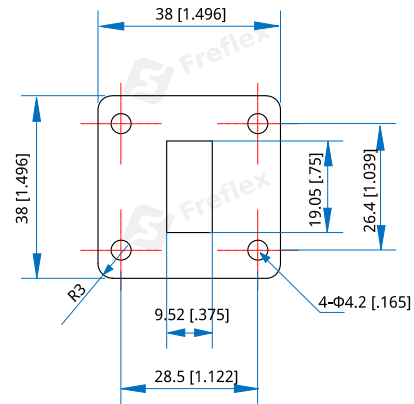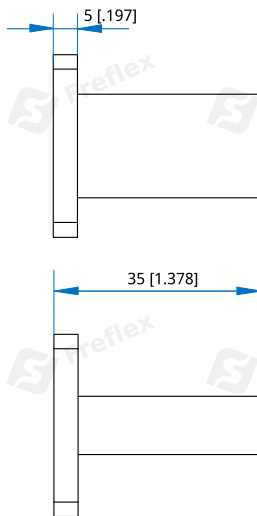

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FWTS75-20-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

1 - FBP120 (Outline A)

Examples:

To order a small size waveguide termination, WR-75, 20W, Aluminum, FBP120, specify FWTS75-20-A-1.

Customization is available upon request.