

FWTS75-30

WR-75, 30W

Features:

- * Low VSWR

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	9.84~15GHz
Average Power:	30W
VSWR:	1.2 max.

Mechanical

Waveguide Size:	WR-75 (BJ120)
Flange:	FBM120
Coating:	Gray paint
Finish:	Conductive oxidation

Environmental

Temperature:	-55~+125°C
--------------	------------

How To Order

FWTS75-30-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


3 - FBM120 (Outline A)

Examples:

To order a small size waveguide termination, WR-75, 30W, Aluminum, FBM120, specify FWTS75-30-A-3.

Customization is available upon request.

Outline Drawings

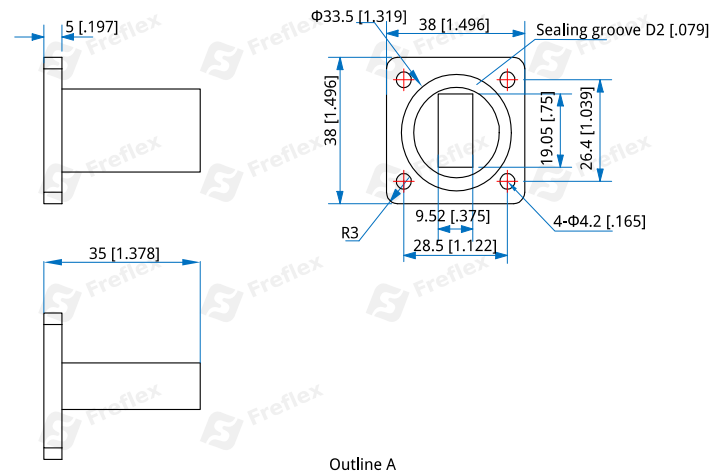

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]