

FPS8-50-26500-A

SP8T, 0.05~26.5GHz, Absorptive

Features:
 * Low Insertion Loss
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.05~26.5GHz
Insertion Loss:	9.5dB max.
Isolation:	60dB min. @0.05~0.5GHz 80dB min. @0.5~26.5GHz
VSWR:	2.7 max. @S21 3 typ. @0.05~0.5GHz
Input Power:	+23dBm max.
Voltage/Current:	+5V@300mA typ. -5V@80mA typ.
Control:	TTL High - 1 TTL Low/NC - 0
Impedance:	50Ω

Mechanical

Size ^{*1} :	101.6*24*10.2mm 4*0.945*0.402in
Switching Time ^{*2} :	150ns max.
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.7mm through-hole


[1] Exclude connectors.

[2] Values at 25°C, sea level. Switching speed is defined as 50% TTL to 90% RF (t-on) and 50% TTL to 10% RF (t-off).

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

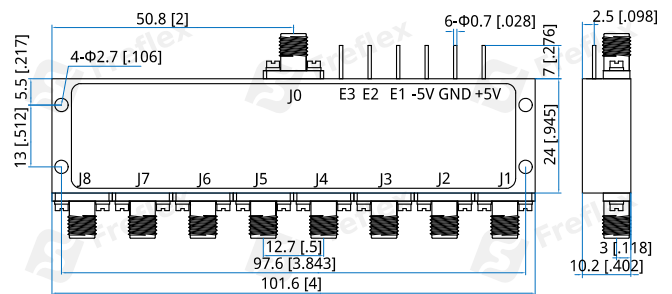

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

E3	E2	E1	Connection
0	0	0	J0 - J1 On
0	0	1	J0 - J2 On
0	1	0	J0 - J3 On
0	1	1	J0 - J4 On
1	0	0	J0 - J5 On
1	0	1	J0 - J6 On
1	1	0	J0 - J7 On
1	1	1	J0 - J8 On

How To Order

FPS8-50-26500-A

Customization is available upon request.