

FRHA1.9

400~600GHz, WR-1.9

Features:

* Broadband

Applications:

* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 400~600GHz
Gain: 15dB min.
VSWR: 1.5 max.

Mechanical

Waveguide size: WR-1.9
Flange: UG387/U

How To Order

FRHA1.9-X-Y-Z

X: Gain in dB

Y: Connector type if applicable


Z: Installation method if applicable

Examples:

To order an antenna, 400~600GHz, 15dB, WR-1.9, specify FRHA1.9-15.

Customization is available upon request.

Outline Drawings

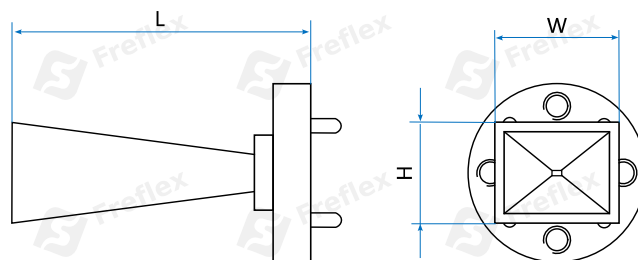

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Length (mm/in)

L	W	H
15 [0.591]	7.4 [0.291]	6.5 [0.256]