

FRHA2.2

325~500GHz, WR-2.2

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 325~500GHz
Gain: 15dB min.
VSWR: 1.5 max.

Mechanical

Waveguide size: WR-2.2
Flange: UG387/U

How To Order

FRHA2.2-X-Y-Z

X: Gain in dB

Y: Connector type if applicable


Z: Installation method if applicable

Examples:

To order an antenna, 325~500GHz, 15dB, WR-2.2, specify FRHA2.2-15.

Customization is available upon request.

Outline Drawings

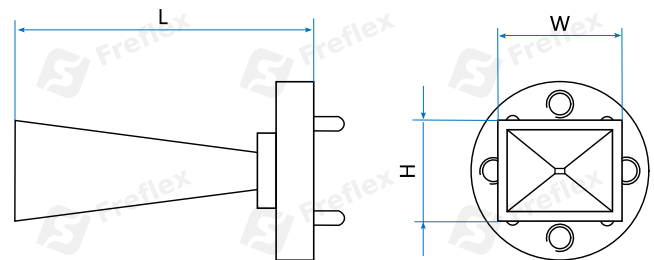

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Length (mm/in)

L	W	H
15 [0.591]	8 [0.315]	7 [0.276]