

FRHA2.8

260~400GHz, WR-2.8

Features:

* Broadband

Applications:

* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 260~400GHz
Gain: 15dB min.
VSWR: 1.5 max.

Mechanical

Waveguide size: WR-2.8
Flange: UG387/U

How To Order

FRHA2.8-X-Y-Z

X: Gain in dB

Y: Connector type if applicable


Z: Installation method if applicable

Examples:

To order an antenna, 260~400GHz, 15dB, WR-2.8, specify FRHA2.8-15.

Customization is available upon request.

Outline Drawings

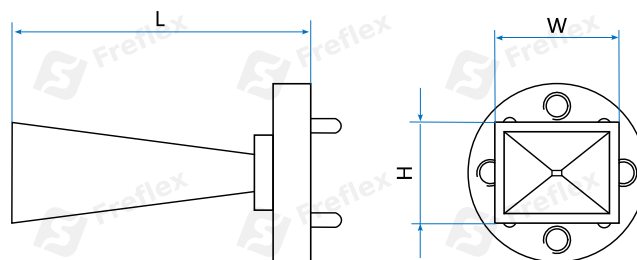

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Length (mm/in)

L	W	H
21 [0.827]	9 [0.354]	7.7 [0.303]