

## FRHA34

### 21.7~33GHz, WR-34

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transceiver  
\* Laboratory Test  
\* Broadcast

#### Electrical

Frequency: 21.7~33GHz  
Gain: 10, 15, 20, 25dB  
VSWR: 1.2 max.  
1.35 max. (Outline E, F, G, H)


#### Mechanical

Interface: WR-34 (BJ260)  
Flange: FBP260  
Material: Brass

#### Environmental

Temperature: -55~+165°C

#### Outline Drawings

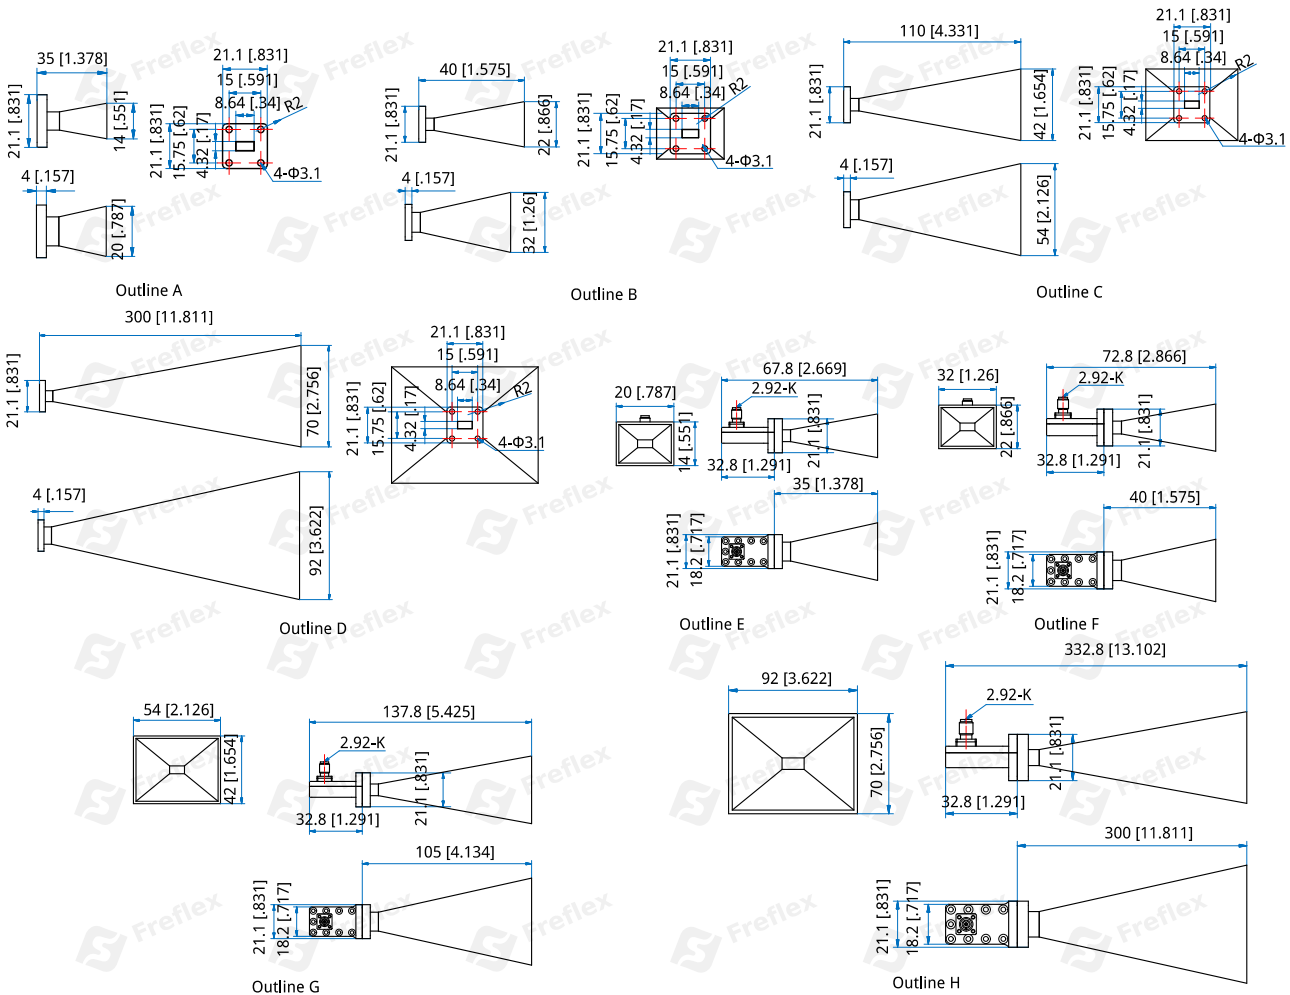

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

# Standard Gain Horn Antennas

## How To Order

### FRHA34-X-Y-Z

X: Gain in dB

10dB - Outline A, E

15dB - Outline B, F

20dB - Outline C, G

25db - Outline D, H

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

K - 2.92mm Female (Outline E, F,G, H)

Pannel Mount naming rules:

P - Pannel Mount

Examples:

To order an antenna, 27.1-33GHz, 15dB, WR-34, 2.92mm Female, specify FRHA34-15-K.

Customization is available upon request.