

# FCGF-MB-M30-01

## SSMP Connector, DC~18GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~18GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	325V DC
Impedance:	50Ω

### Mechanical


RF Connector*1:	SSMP Male
Mating Life Cycle:	500 cycles
Detent Mode:	Full detent
Outer Conductor:	Gold plated brass
Dielectric:	PEEK
Inner Conductor:	Gold plated beryllium copper

[1] Mateable with GPPO, SMPM & Mini-SMP.

### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

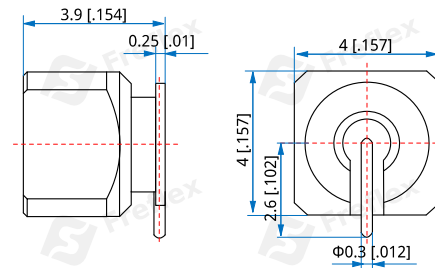

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FCGF-MB-M30-01**

Customization is available upon request.