

FVO-9000-9500-13

9~9.5GHz, 13dBm

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	9~9.5GHz
Electrically Adjustable Bandwidth:	500MHz
Control Voltage:	5-11V
Output Power:	13dBm min.
2nd Harmonic:	-20dBc max.
Spurious:	-70dBc max.
Voltage:	+12V DC
Current:	500mA max.

Mechanical


Size ^{*1} :	84*75*16mm 3.307*2.953*0.63in
RF Connectors:	SMA Female
Power Supply & Control Interface:	Feed Through/Terminal Post
Mounting:	4-Φ3mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

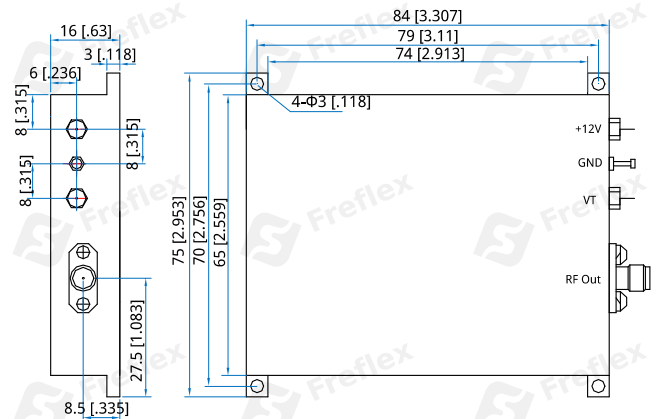

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FVO-9000-9500-13

Customization is available upon request.