

FVLC-1F-1

1mm, DC~110GHz

Features:

- * Low VSWR
- * No welding
- * Reusable
- * Easy installation

Applications:

- * Laboratory Test

Electrical

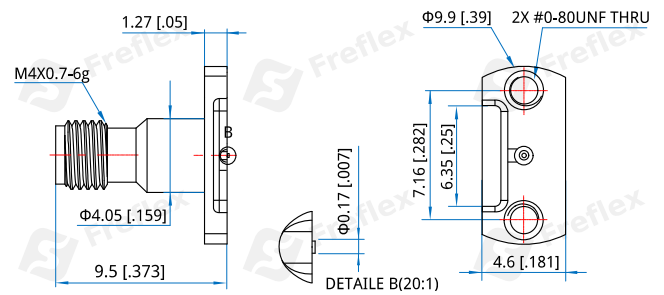
Frequency:	DC~110GHz
VSWR:	1.5 max.
Impedance:	50Ω

Mechanical

RF Conductor:	1.0mm Female
Inner Conductor:	Gold plated beryllium copper
Outer Conductor:	SUS303 stainless steel

How To Order
FVLC-1F-1

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]