

FVLC-2

2.4mm, DC~50GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~50GHz
VSWR*1: 1.4 max.
Impedance: 50Ω

[1] VSWR version is available upon request.


Environmental

Temperature: -55~+165°C

Mechanical

RF Connector: 2.4mm
Mating Life Cycle: 500 cycles
Inner Conductor: Gold plated copper
Dielectric: PEI&PTFE
Outer Conductor: Stainless steel passivation

Outline Drawings

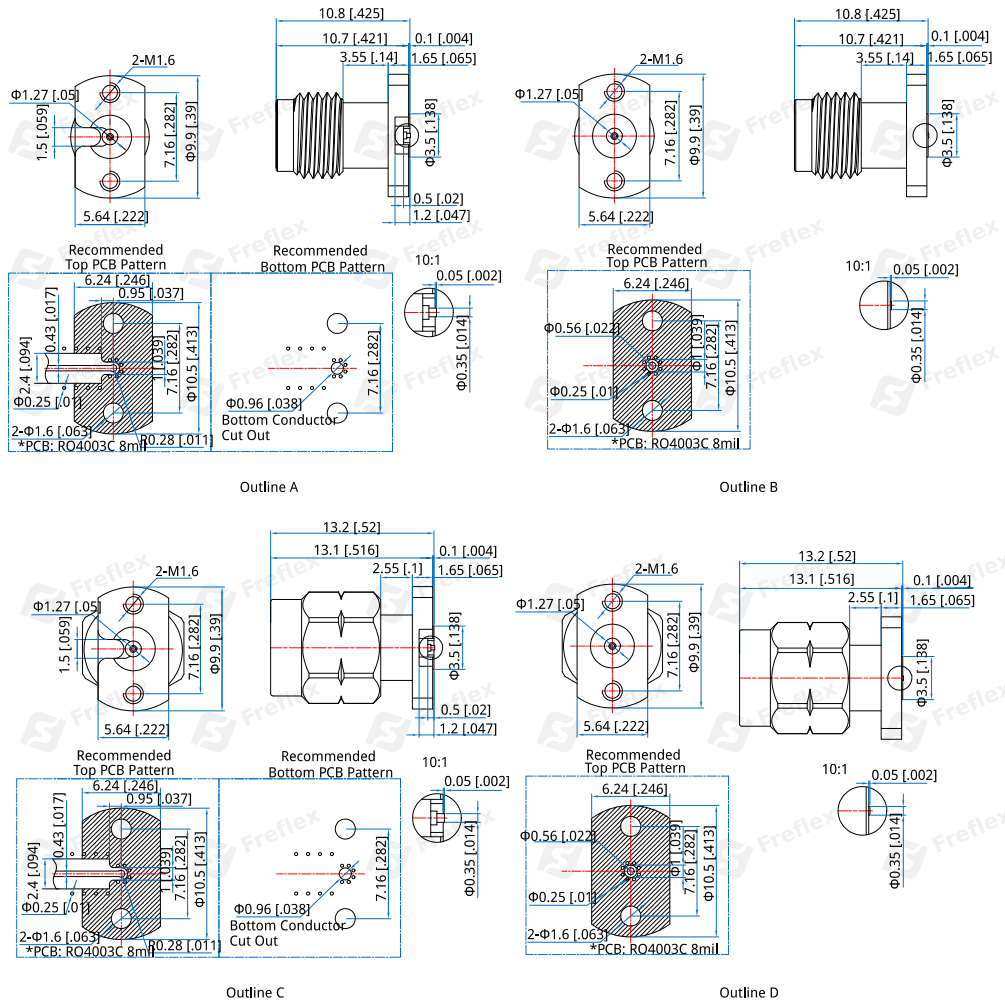

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]



Vertical Launch Connector

How To Order

[FVLC-2F-1](#) - Outline A

[FVLC-2F-2](#) - Outline B

[FVLC-2-1](#) - Outline C

[FVLC-2-2](#) - Outline D

Customization is available upon request.