

FVLC-K

2.92mm, DC~40GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR^{*1}: 1.3 max.
Impedance: 50Ω

[1] VSWR version is available upon request.


Environmental

Temperature: -55~+165°C

Mechanical

RF Connector: 2.92mm
Mating Life Cycle: 500 cycles
Inner Conductor: Gold plated copper
Dielectric: PEI&PTFE
Outer Conductor: Stainless steel passivation

Outline Drawings

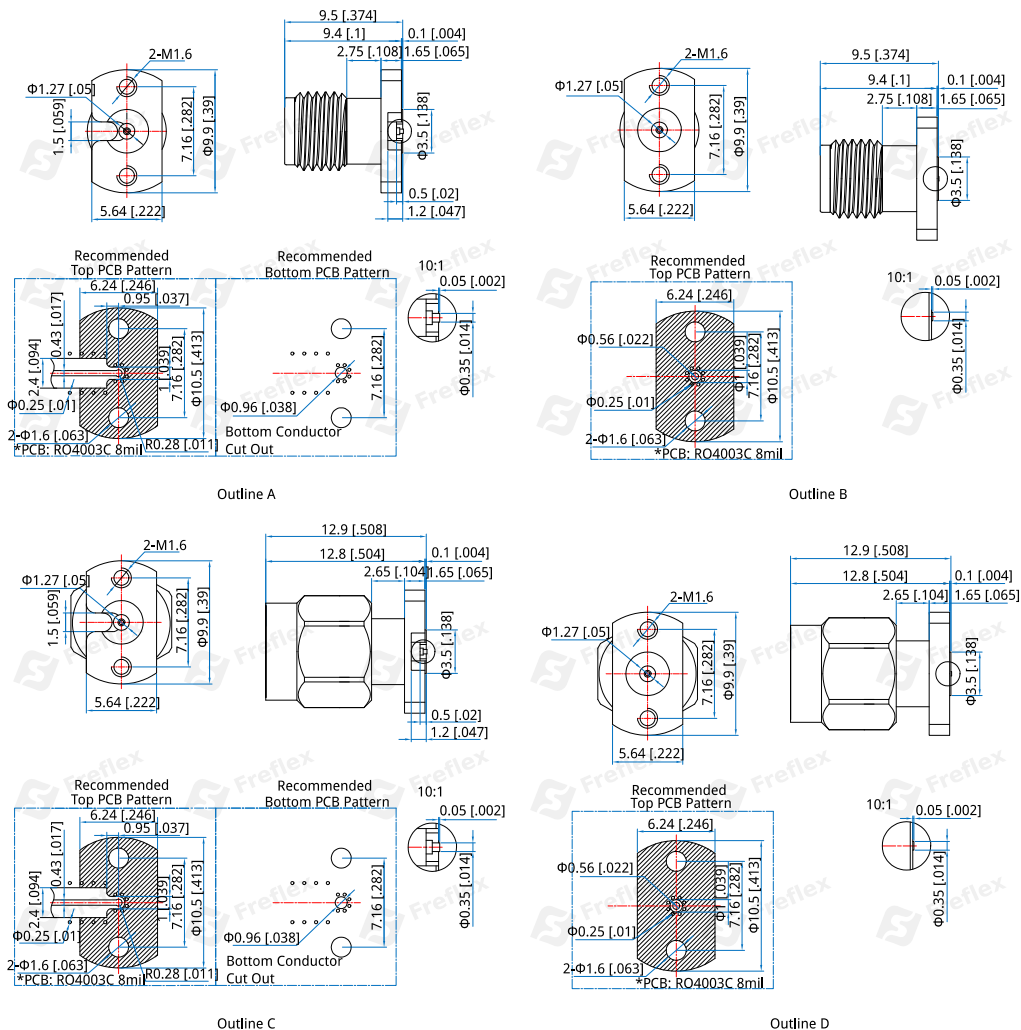



Vertical Launch Connectors

How To Order

[FVLC-KF-1](#) - Outline A

[FVLC-KF-2](#) - Outline B

[FVLC-K-1](#) - Outline C

[FVLC-K-2](#) - Outline D

Customization is available upon request.