

FVLC-S SMA, DC~26.5GHz

- Features:**
- * Low VSWR
 - * No welding
 - * Reusable
 - * Easy installation

- Applications:**
- * Laboratory Test

Electrical

Frequency: DC~26.5GHz
 VSWR: 1.25 max.
 Impedance: 50Ω


Environmental

Temperature: -55~+165°C

Mechanical

RF Conductor: SMA
 Mating Life Cycle: 500 cycles
 Inner Conductor: Gold plated copper
 Dielectric: PEI&PTFE
 Outer Conductor: Stainless steel passivation

Outline Drawings

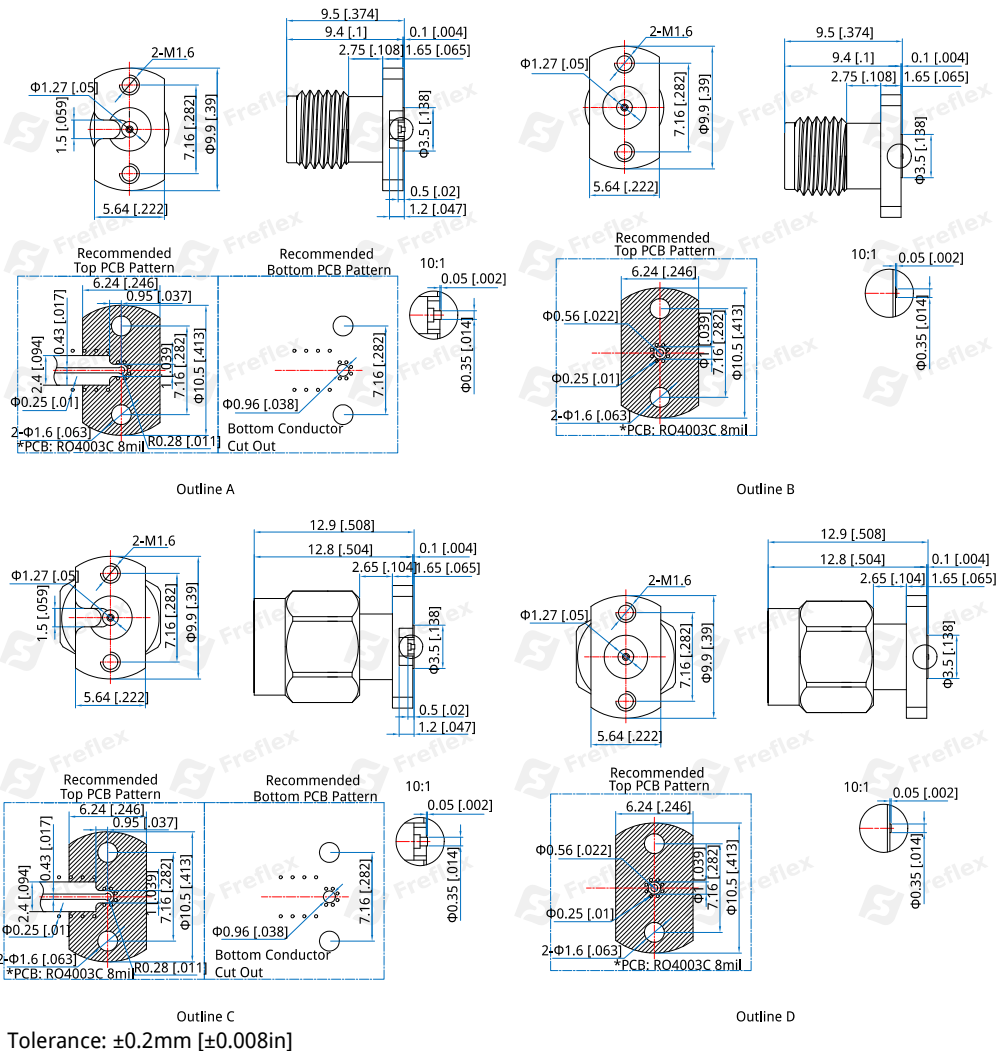



Vertical Launch Connectors

How To Order

[FVLC-SF-1](#) - Outline A

[FVLC-SF-2](#) - Outline B

[FVLC-S-1](#) - Outline C

[FVLC-S-2](#) - Outline D

Customization is available upon request.