

## FWBF-14930-20

14.93GHz, 20dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Input RF Frequency:	14.93GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.5 max.
Stopband Attenuation:	20dB@14.9GHz min. 20dB@14.96GHz min.
Power Handling:	5W CW
Impedance:	50Ω

### How To Order

**FWBF-14930-20-X-Y-Z**

X: Connector type

Y: Material

Z: Flange type

Connector naming rules:

62 - WR-62

Material naming rules:

A - Aluminium

Flange naming rules:

1 - FBP

Examples:


To order a Waveguide Band Pass Filter, 14.93GHz, 20dB, WR-62, Aluminium, FBP140 to FBP140, specify FWBF-14930-20-62-A-1-1.

Customization is available upon request.

### Mechanical

Size:	85*70*33.3mm 3.346*2.756*1.311in
Waveguide:	WR-62 (BJ140) with FBP140
Mounting:	8-Φ4mm through-hole

### Outline Drawings

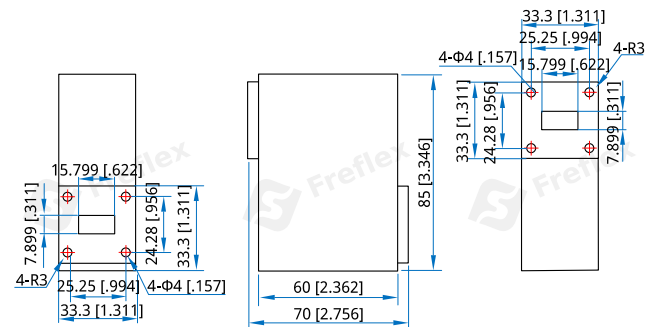

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]