

FWB-650 WR-650

Features:
* Low VSWR
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 1.13~1.73GHz
VSWR: 1.1 max.
Pressure Resistance: 0.2MPa

Mechanical

Interface: WR-650 (BJ14)
Flange: FDP14
Material: Aluminum
Coating: Gray paint
Finish: Conductive oxidation

How To Order

FWB-650-U-W-X-Y-Z

U: Angle:
90 - 90°
W: H plane: H, E plane: E.
X: Material
Y: Flange type
Z: Serial number if different sizes

Bending Side:
E - E plane (Outline A)

Material naming rules:
A - Aluminum (Outline A)


Flange naming rules:
2 - FDP (Outline A)

Serial number naming rules:
01 - (Outline A)

Examples:
To order a waveguide Bends, WR-650, 90°, E plane, Aluminum, FDP14, 100*100mm, specify FWB-650-90-E-A-2-01.

Customization is available upon request.

Outline Drawings

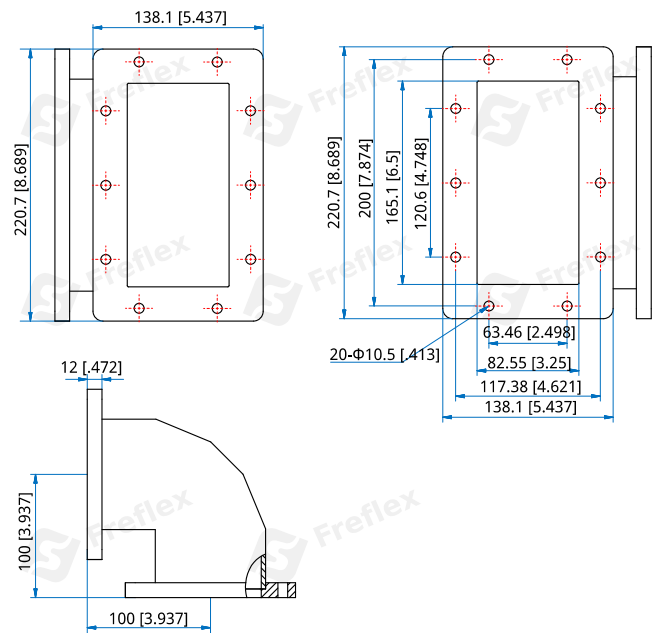

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]