

FWC-2950-3050-2K4

2.95~3.05GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Electrical

Frequency:	2.95~3.05GHz
Insertion Loss:	0.5dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Average Power:	2.4KW
Peak Power:	24KW

Mechanical

Interface:	WR-284 (BJ32)
Flange:	FDM32
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Sea gray

Outline Drawings

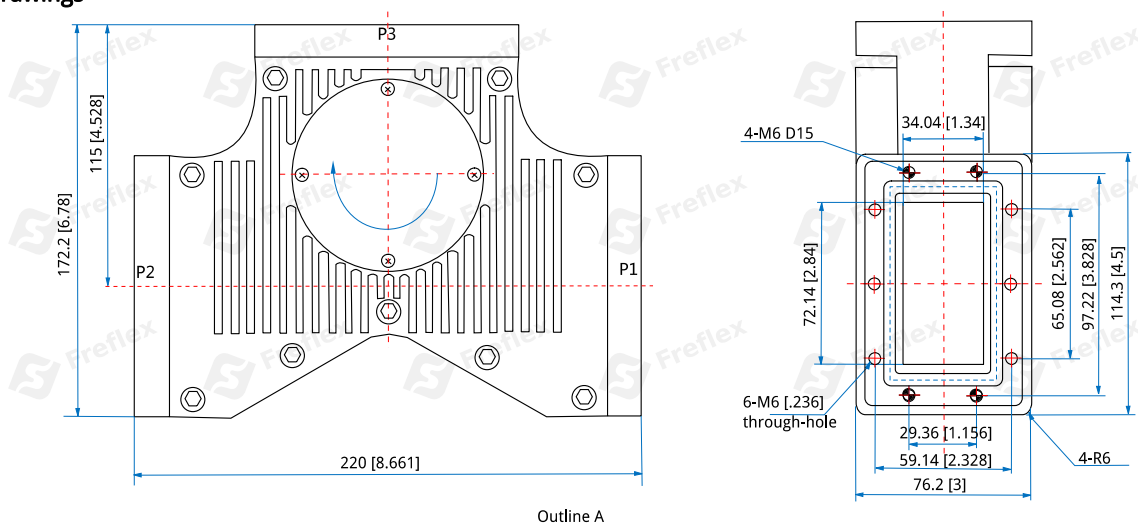

Environmental

Temperature:	-40~+70°C
Non-operating Temperature:	-40~+70°C
Non-operating Humidity:	80% max.

Examples:

To order a Waveguide Circulator, 2.95~3.05GHz, 2.4KW, Aluminium, FDM32, specify FWC-2950-3050-2K4-A-4.

Customization is available upon request.

How To Order

FWC-2950-3050-2K4-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

4 - FDM (Outline A)