

FWC-40000-46000-5

40~46GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	40~46GHz
Insertion Loss:	0.4dB max.
Isolation:	15dB min.
VSWR:	1.4 max.
Average Power:	5W
Peak Power:	50W

Mechanical

Interface:	WR-22 (BJ400)
Flange:	FUGP400
Material:	Copper
Coating:	Gold-plating
ROHS Compliant:	Full ROHS compliance

How To Order

FWC-40000-46000-5-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper

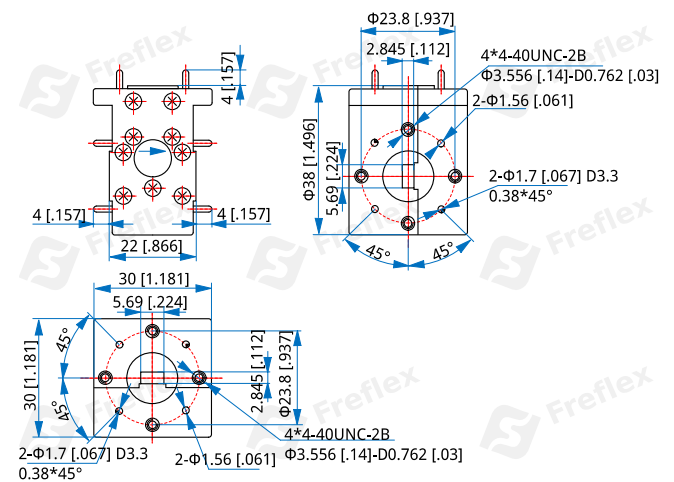
Flange naming rules:

5 - UG-383/U (FUGP400)

Examples:

To order a Waveguide Circulator, 40~46GHz, 5W, Copper, FUGP400, specify FWC-40000-46000-5-C-5.

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.06 mm [± 0.002 in]