

FWC-50000-53000-1

50~53GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Electrical

Frequency:	50~53GHz
Isolation:	15dB
VSWR:	1.5 max.
Average Power:	1W

Mechanical

Interface:	WR-19 (BJ500)
Flange:	FUGP500
Material:	Copper
Finish:	Gold-plating

Outline Drawings

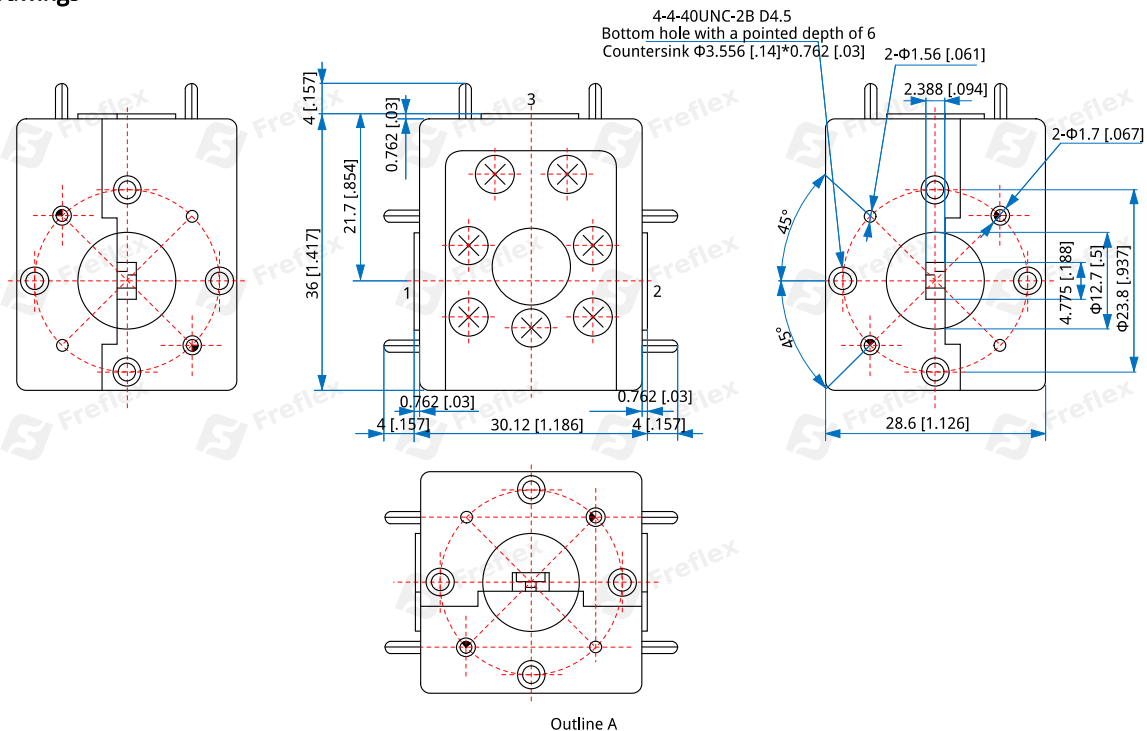

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FWC-50000-53000-1-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

10 - UG-383/UM (FUGP500) (Outline A)

Examples:

To order a Waveguide Circulator, 50~53GHz, 1W, Copper, FUGP500, specify FWC-50000-53000-1-C-10.

Customization is available upon request.