

FWFA62-1K WR-62, 1000W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

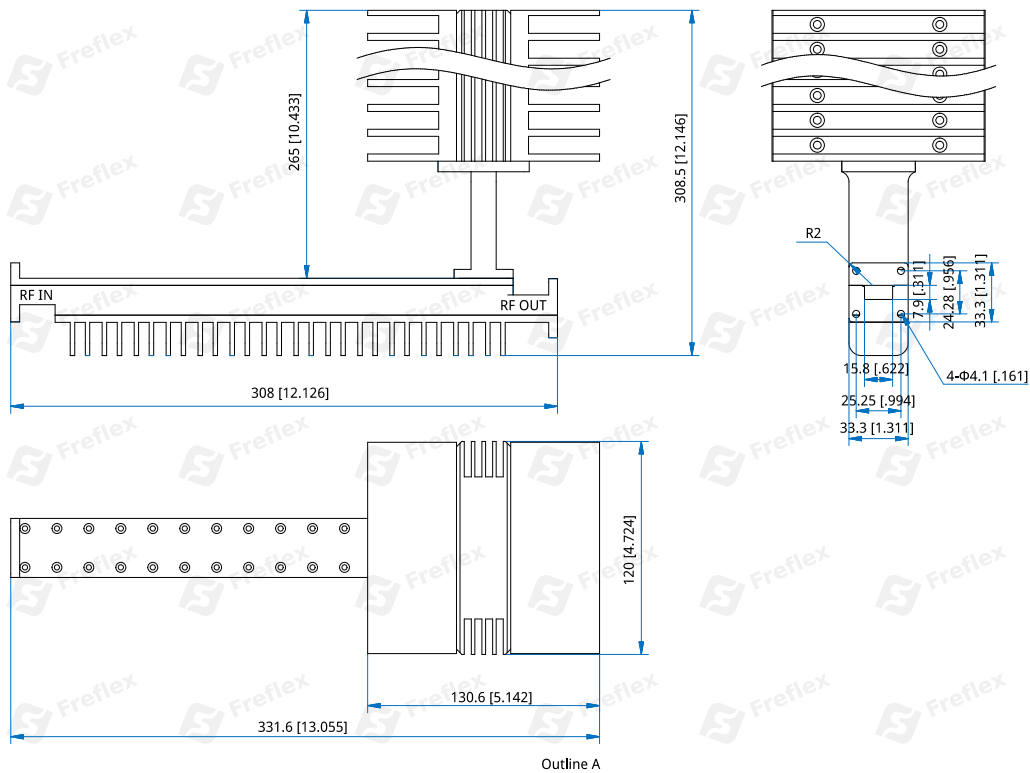
- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	11.9~18GHz
VSWR:	1.2 max.
Attenuation:	40±1dB
Average Power:	1000W

Mechanical

Interface:	WR-62 (BJ140)
Flange:	FBP140
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

Outline Drawings


Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

How To Order

FWFA62-1K-X-Y-Z

X: Attenuation in dB (40 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 11.9~18GHz, 40dB, Aluminium, FBP140, specify FWFA62-1K-40-A-1.

Customization is available upon request.