

FWFA62-60

WR-62, 60W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

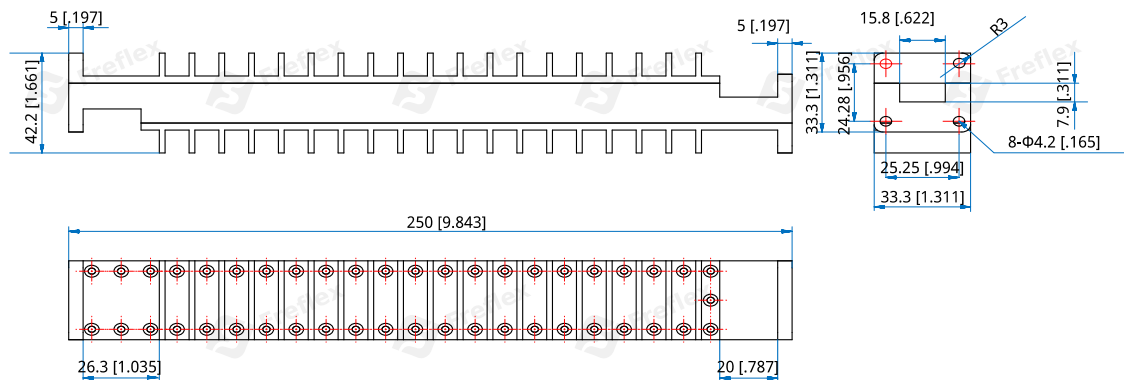
Frequency:	12.4~18GHz
VSWR:	1.2 max.
Attenuation:	30±1.5dB
Average Power:	60W

Mechanical

Interface:	WR-62 (BJ140)
Flange:	FBP140
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

Environmental

Operating Temperature: -40~+125°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FWFA62-60-X-Y-Z

X: Attenuation in dB: 30

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium

Flange naming rules:

1 - FBP

Examples:

To order a Waveguide Fixed Attenuator, 12.4~18GHz, 30dB, Aluminium, FBP140, specify FWFA62-60-30-A-1.

Customization is available upon request.