

# FWI-18000-26500-K1

## Broadband & High Isolation

**Features:**

- \* Broadband
- \* High Isolation
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

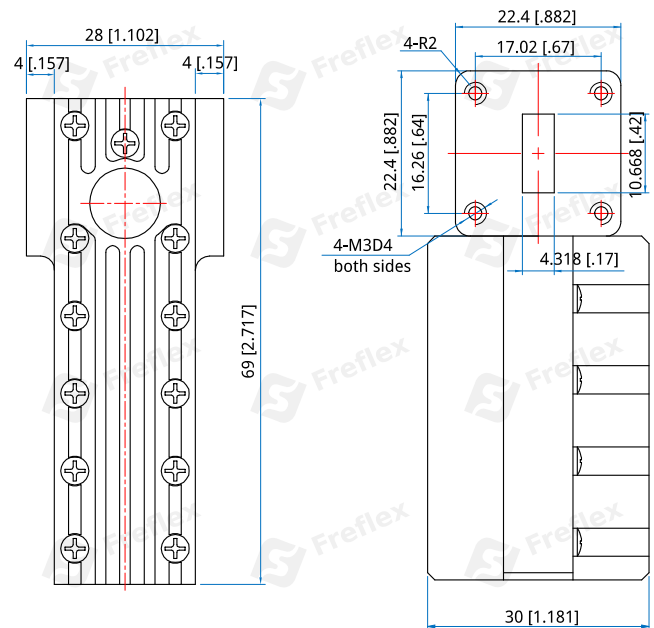
Frequency:	18~26.5GHz
Insertion Loss:	0.3dB max.
Isolation:	20dB min.
VSWR:	1.3 max.
Fwd Power:	100W
Rev Power:	20W

**Mechanical**

Size:	69*28*30mm 2.717*1.102*1.181in
Interface:	WR-42 (BJ220)
Flange:	FBP220
Material:	Aluminium
Finish:	Natural color conductive oxidation
Mounting:	4-M3 Depth 4mm

**How To Order**
**FWI-18000-26500-K1**

Customization is available upon request.

**Outline Drawings**


Unit: mm [inch]

 Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]