

## FWSS-34 WR-34

Features:  
\* Low VSWR  
\* High Isolation

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 21.7~33GHz  
VSWR: 1.08 max.  
Insertion Loss: 0.1 max.

### Mechanical

Length: 0.03m  
1.181in  
Waveguide size: WR-34 (BJ260)  
Flange: FBP260  
Material: Aluminum Alloy

### How To Order

#### FWSS-34-X-Y-Z

X: Length  
Y: Material  
Z: Flange type

Length in mm:  
30 - 30mm (Outline A, B)

Material naming rules:  
A - Aluminum (Outline A, B)

Flange naming rules:  
1 - FBP (Outline A, B)


01- Outline A  
02- Outline B

#### Examples:

To order a waveguide straight section, WR-34, 30mm, Aluminum, FBP260, Outline A, specify FWSS-34-30-A-1-01.

Customization is available upon request.

### Outline Drawings

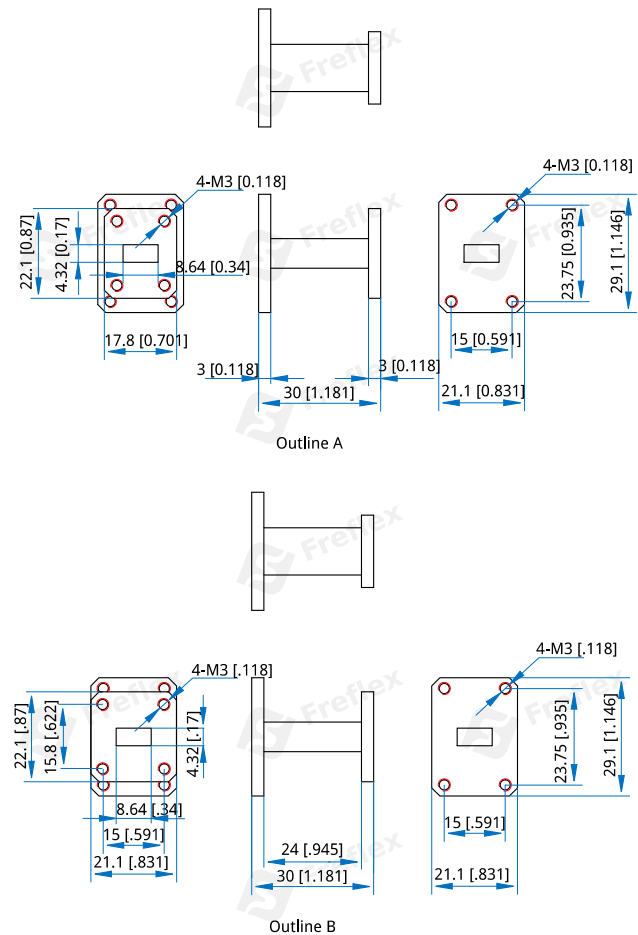

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]