

FWSS-340

WR-340

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: 2.17~3.3GHz
2.4~2.5GHz (Outline B)

Pressure Resistance: 0.1MPa (Outline B)

Length (mm)	VSWR (max.)	Insertion Loss (dB max.)	Outline Drawings
250	1.05	0.06	Outline A
250	1.2	0.2	Outline B

Mechanical

Interface: WR-340 (BJ26)
Flange: FDM26
Material: Aluminum
Finish: Conductive oxidation
Coating: Gray paint

How To Order

FWSS-340-X-Y-Z-W

X: Length in mm.

Y: Material

Z: Flange type

W: Serial number if there are duplicate models with different appearances. Outline B: 1

Length in mm:

250-250mm

Material naming rules:

A - Aluminium

Flange naming rules:


4 - FDM

Examples:

To order a waveguide straight section, WR-340, 250mm, Aluminium, FDM26, specify FWSS-340-250-A-4.

Customization is available upon request.

Outline Drawings

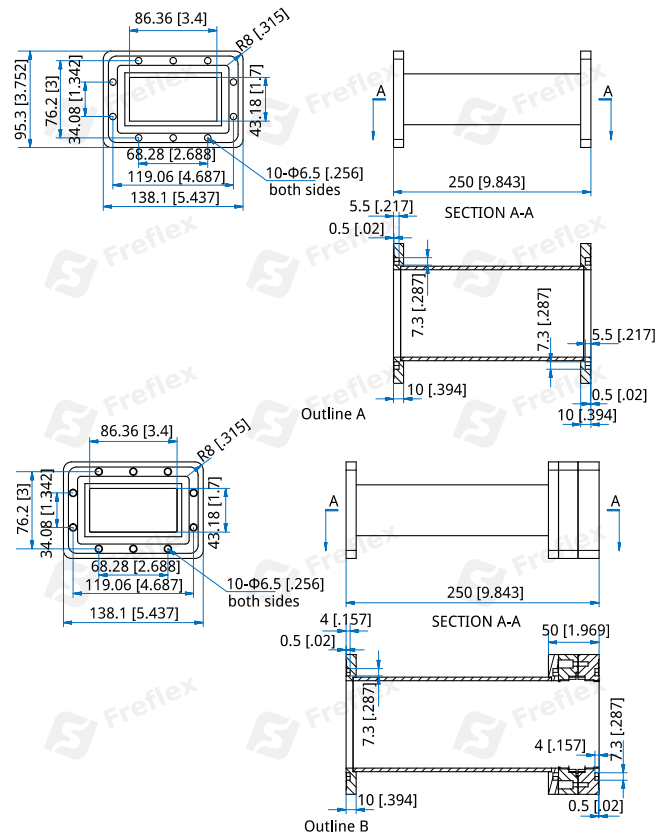

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]