

FWSS-42 WR-42

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	18–26.5GHz
VSWR:	1.05 max.
Insertion Loss:	0.08 max.

Mechanical

Length:	0.762m 3in
Waveguide size:	WR-42 (BJ220)
Flange:	FBP220
Material:	Copper

How To Order

FWSS-42-X-Y-Z

- X: Length
Y: Material
Z: Flange type

Length in mm:

76.2 - 76.2mm (Outline A)

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


1 - FBP (Outline A)

Examples:

To order a waveguide straight section, WR-42, 76.2mm, Copper, FBP220, specify FWSS-42-76.2-C-1.

Customization is available upon request.

Outline Drawings

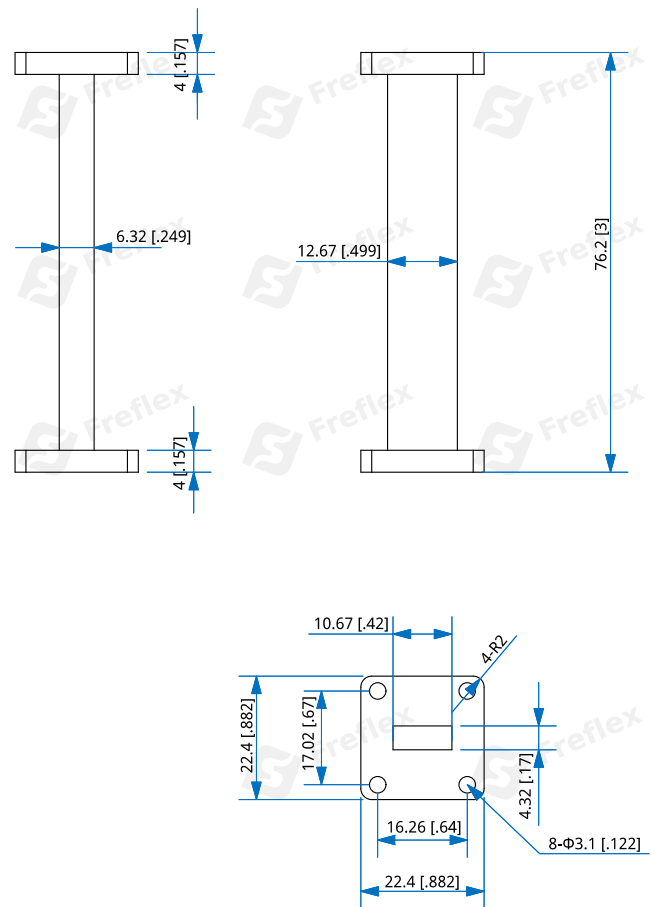

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]