

FWSS-62 WR-62

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	11.9~18GHz
VSWR:	1.05 max.
Insertion Loss:	0.05dB max.

Mechanical

Length:	76.2mm
	3in
Waveguide size:	WR-62 (BJ140)
Flange:	FBP140
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

How To Order

FWSS-62-X-Y-Z

X: Length

Y: Material

Z: Flange type

Length in mm:

76.2 - 76.2mm (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


1 - FBP (Outline A)

Examples:

To order a waveguide straight section, WR-62, 76.2mm, Aluminium, FBP140, specify FWSS-62-76.2-A-1.

Customization is available upon request.

Outline Drawings

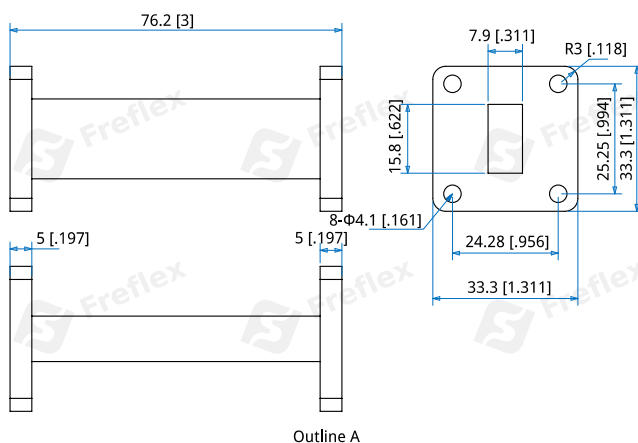

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]