

FWSS-650 WR-650

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency: 1.13~1.73GHz
 VSWR: 1.1 max.
 Pressure Resistance: 0.2MPa

Mechanical

Interface: WR-650 (BJ14)
 Flange: FDP14
 Material: Aluminum
 Surface Treatment: Conductive oxidation
 Coating: Gray paint

Outline Drawings

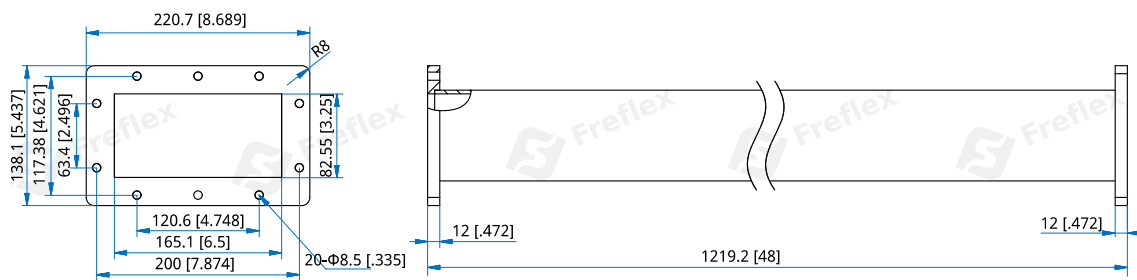

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWSS-650-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

1219-1219.2mm

Material naming rules:

A - Aluminium

Flange naming rules:

2 - FDP

Examples:

To order a waveguide straight section, WR-650, 500mm, Aluminium, FDP14, specify FWSS-650-500-A-2.

Customization is available upon request.