FWSS-75

WR-75

Features:
* Low VSWR
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	9.84~15GHz
VSWR:	1.05 max.
Insertion Loss:	0.25dB/m

Mechanical

Interface:	WR-75 (BJ120)
Flange:	FBP120
Material:	Aluminium
Surface Treatment:	Conductive oxidation
Coating:	Black paint

Outline Drawings

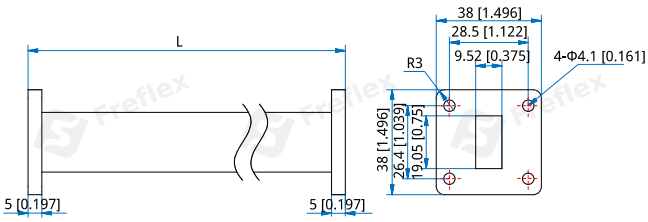

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FWSS-75-X-Y-Z
X: Length in mm.
Y: Material
Z: Flange type

Length in mm:
100 - 100mm
200 - 200mm
500 - 500mm

Material naming rules:
A - Aluminum

Flange naming rules:
1 - FBP

Examples:
To order a waveguide straight section, WR-75, 100mm, Aluminum, FBP120, specify FWSS-75-100-A-1.

Customization is available upon request.