

FWSS-D350-100-A-8-H

WRD-350, 100mm, Bulk Head

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.5~8.2GHz
VSWR:	1.1 max.
Insertion Loss:	0.15dB max.

Mechanical


Interface:	WRD-350
Flange:	FPWRD350
Material:	Aluminum
Finish:	Conductive oxidation
Coating:	Gray paint

How To Order

FWSS-D350-100-A-8-H

Customization is available upon request.

Outline Drawings

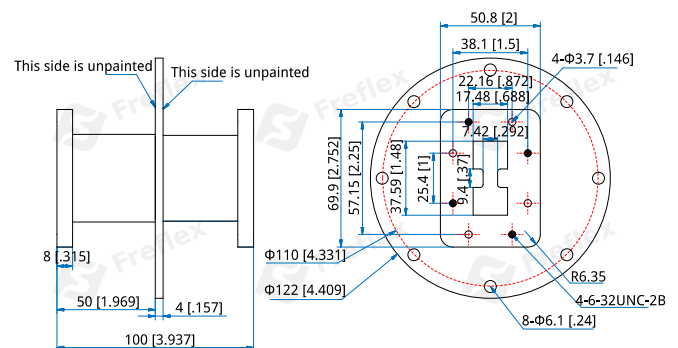

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]