

FWSS-D750-100-A-8-H

WRD-750, 100mm, Bulk Head

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar


Electrical

Frequency: 7.5~18GHz
 VSWR: 1.1 max.
 Insertion Loss: 0.1dB max.

Mechanical

Interface: WRD-750
 Flange: FPWRD750
 Material: Aluminum
 Finish: Conductive oxidation
 Coating: Black paint

Outline Drawings

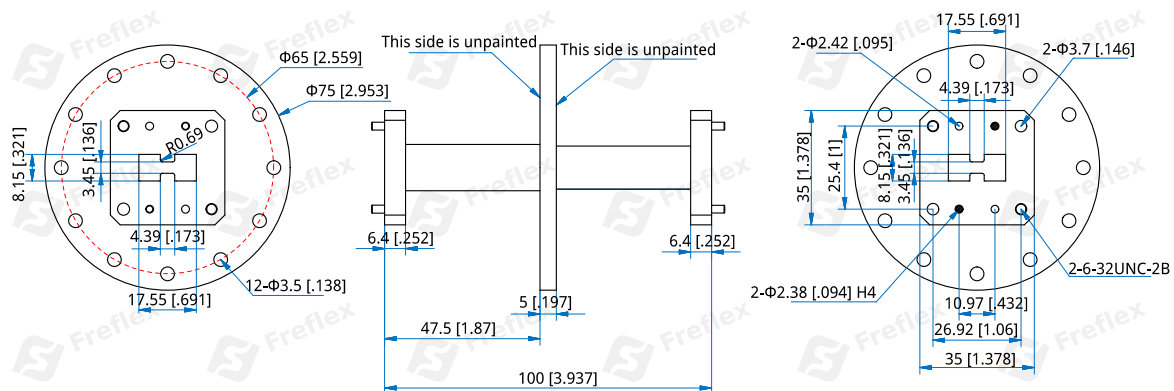

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FWSS-D750-100-A-8-H

Customization is available upon request.