

FWTR-430-340

WR-430 to WR-340

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar


Electrical

Frequency: 2.4~2.5GHz
 VSWR: 1.2 max.

Mechanical

Waveguide Size & Flange: WR-430 (BJ22) with FDP22
 Waveguide Size & Flange: WR-340 (BJ26) with FDP26
 Material: Aluminum
 Finishing: Conductive oxidation
 Coating: Black paint

Outline Drawings

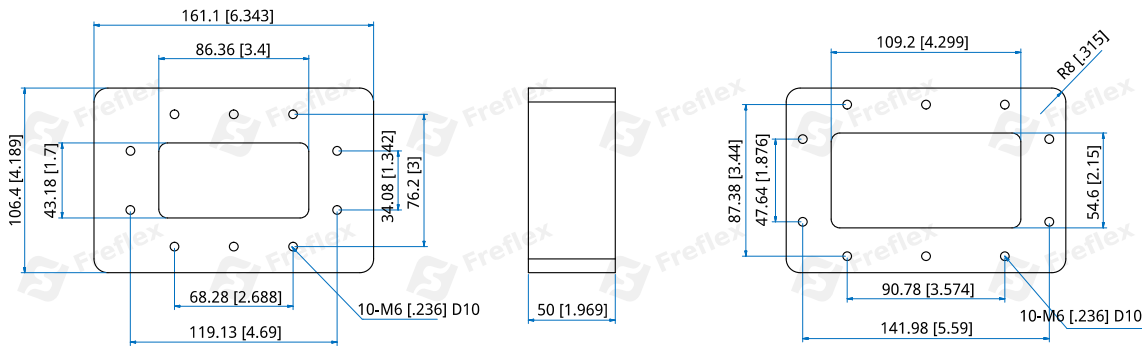

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWTR-430-340-W-X-Y

W: Length

X: Material

Y: Flange type

Length in mm.

50 - 50mm (Outline A)

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2-2 - FDP22-FDP26 (Outline A)

Examples:

To order a Waveguide Transition, WR-430 to WR-340, 50mm, Aluminum, FDP22-FDP26, specify FWTR-430-340-50-A-2-2.

Customization is available upon request.