

FTW-10 WR-10

Features:

- * Low VSWR
- * High Isolation

Applications:

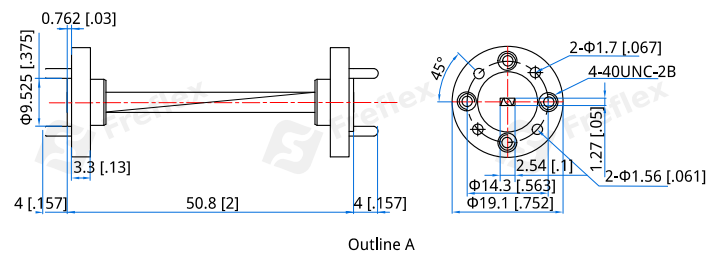
- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: 73.8~110GHz
 VSWR: 1.15 max.

Mechanical

Size: 50.8* Φ 19.1mm
 2* Φ 0.752in
 Waveguide Size: WR-10 (BJ900)
 Flange: UG387/UM
 Material: Brass
 Finish: Gold-plating

Outline Drawings


Unit: mm [in]
 Tolerance: \pm 0.2mm [\pm 0.008in]

How To Order
FTW-10-X-Y-Z

X: Length in mm.
 Y: Material
 Z: Flange type

Length in mm:
 50.8 - 50.8mm (Outline A)

Material naming rules:
 B - Brass (Outline A)

Flange naming rules:
 12 - UG-387/UM (Outline A)

Examples:
 To order a Waveguide Twist, WR-10, 50.8mm, Brass, UG-387/UM, specify FTW-10-50.8-B-12.

Customization is available upon request.