

## FWVA-112-A-2

WR-112, Aluminum, FDP84

### Features:

- \* Low VSWR
- \* High Attenuation Flatness

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	7~8GHz
VSWR:	1.5 max.
Attenuation:	0~30dB
Power:	25W CW


### Mechanical

Waveguide Size:	WR-112 (BJ84)
Flange:	FDP84
Material:	Aluminum
Coating:	Conductive oxidation

### Environmental

Temperature: -40~+85°C

### Outline Drawings

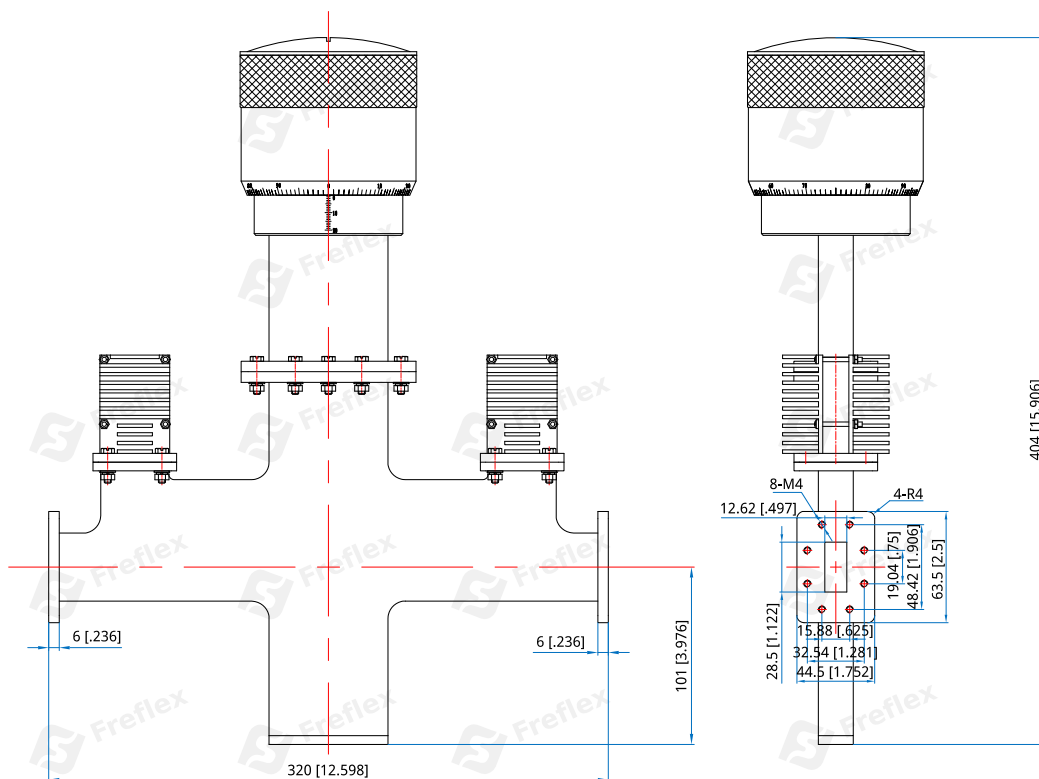

Unit: mm [in]

Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

### How To Order

**FWVA-112-A-2**

Customization is available upon request.