

FWVA-28-B-1

WR-28, Brass, FBP320

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	26.5~40GHz
VSWR:	1.2 max.
Attenuation:	0~30dB
Starting Attenuation:	0.5dB max.
Peak Power:	10KW

Mechanical

Waveguide Size:	WR-28 (BJ320)
Flange:	FBP320
Material:	Brass

Outline Drawings

(Dimensions are for reference only and are subject to change.)

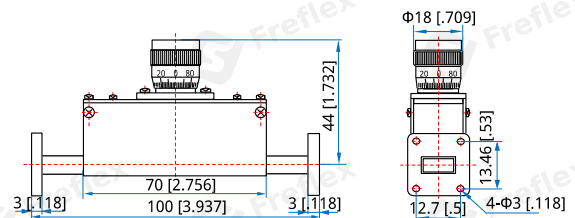

Unit: mm [in]

Tolerance: $\pm 0.02\text{mm}$ [$\pm 0.001\text{in}$]

How To Order

FWVA-28-B-1

Customization is available upon request.