

FWVA-3.4-B-6

WR-3.4, Brass, UG385/U

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	220~325GHz
VSWR:	1.3 max.
Attenuation:	0~30dB
Insertion Loss:	2dB max.
Handling Power:	0.5W


Mechanical

Size:	H*W*Lmm 61*21*22mm 2.402*0.827*0.866in
Waveguide Size:	WR-3.4
Flange:	UG385/U
Material:	Brass

Environmental

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

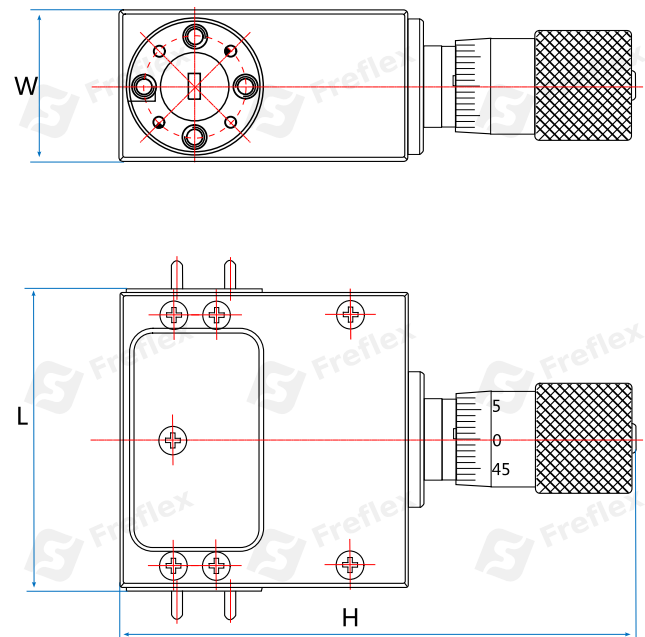

Unit: mm [in]
Tolerance: ±0.5mm [±0.012in]

How To Order

FWVA-3.4-B-6

Customization is available upon request.