

FWVA-6.5-B-6

WR-6.5, Brass, UG385/U

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

| | |
|-----------------|------------|
| Frequency: | 110~170GHz |
| VSWR: | 1.2 max. |
| Attenuation: | 0~30dB |
| Insertion Loss: | 2dB max. |
| Handling Power: | 1W |


Mechanical

| | |
|-----------------|---------------------|
| Size: | H*W*Lmm |
| | 73*21*28mm |
| | 2.875*0.827*1.102in |
| Waveguide Size: | WR-6.5 |
| Flange: | UG385/U |
| Material: | Brass |

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -20~+70°C |
| Non-operating Temperature: | -40~+85°C |

Outline Drawings

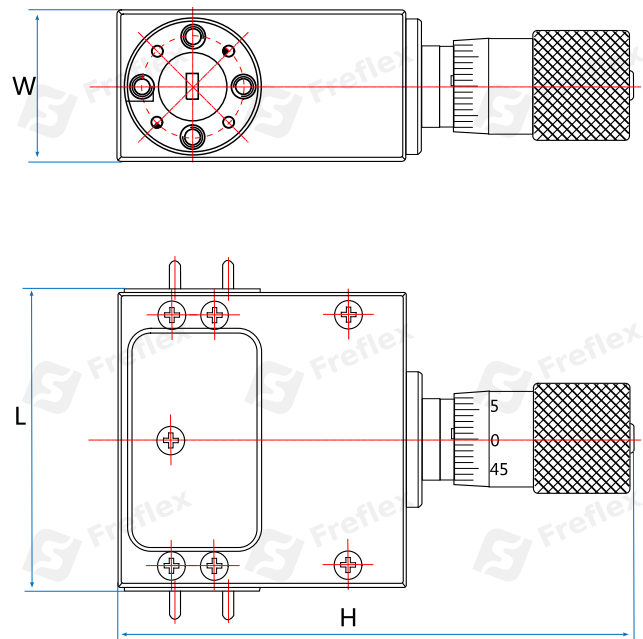

Unit: mm [in]
Tolerance: ±0.5mm [±0.012in]

How To Order

FWVA-6.5-B-6

Customization is available upon request.