

FWVA-75-B-1

WR-75, Brass, FBP120

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	9.84~15GHz
VSWR:	1.2 max.
Attenuation:	0~30dB max.
Starting Attenuation:	0.5dB max.
Position Readout Resolution:	0.02mm

Mechanical

Waveguide Size:	WR-75 (BJ120)
Flange:	FBP120
Material:	Brass

Outline Drawings

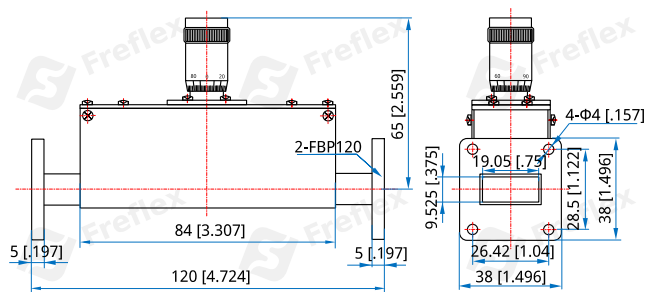

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWVA-75-B-1

Customization is available upon request.