

## FWVA-8-B-6

WR-8, Brass, UG385/U

**Features:**

- \* Low VSWR
- \* High Attenuation Flatness

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	90~140GHz
VSWR:	1.2 max.
Attenuation:	0~30dB
Insertion Loss:	1.5dB max.
Handling Power:	1W


**Mechanical**

Size:	H*W*Lmm 75*21*32mm 2.953*0.827*1.26in
Waveguide Size:	WR-8
Flange:	UG385/U
Material:	Brass

**Environmental**

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

**Outline Drawings**

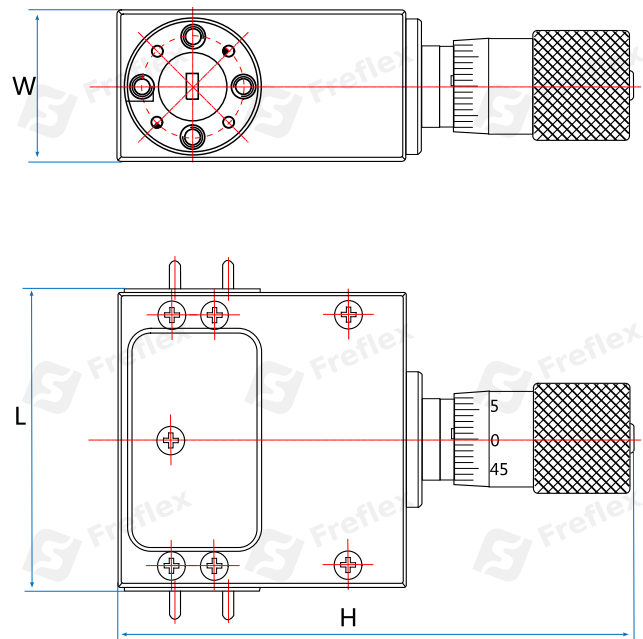

Unit: mm [in]

Tolerance: ±0.5mm [±0.012in]

**How To Order**

**FWVA-8-B-6**

Customization is available upon request.