

FWVA-90-A-2

WR-90, Aluminum, FDP100

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	10~11GHz
VSWR:	1.5 max.
Attenuation:	0~30dB
	28dB min. @11GHz
Average Power:	25W


Mechanical

Waveguide Size:	WR-90 (BJ100)
Flange:	FDP100
Material:	Aluminum
Inner Cavity Coating:	Conductive oxidation
Paint Color:	Gray paint

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

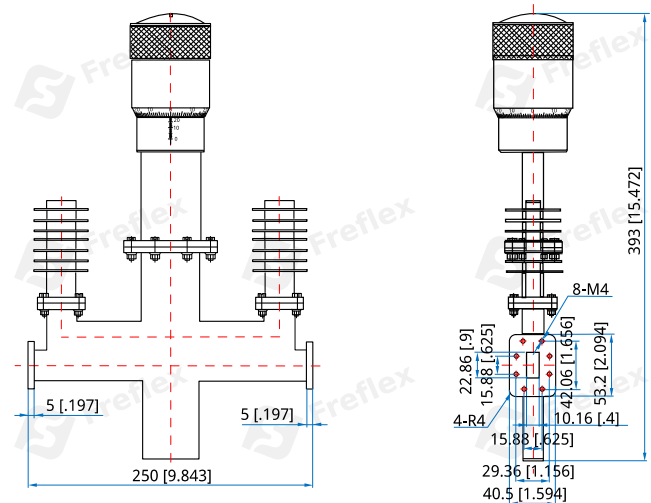

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWVA-90-A-2

Customization is available upon request.