

FWVA-112-B-1

WR-112, Brass, FBP84

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

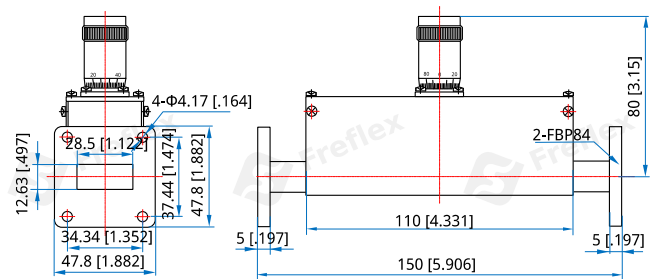
- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6.57~9.99GHz
VSWR:	1.25
Attenuation:	0~30dB
Insertion Loss:	0.3dB

Mechanical

Waveguide Size:	WR-112 (BJ84)
Flange:	FBP84
Material:	Brass

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FWVA-112-B-1

Customization is available upon request.