

FRF-1710-1940-40

1.71~1.94GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.66GHz 1.99~4.5GHz
Passband Insertion Loss:	1.5dB max. (at the corner: 2.0dB max.)
Passband VSWR:	1.7 max.
Stopband:	1.71~1.94GHz
Stopband Attenuation:	40dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*45*22mm 9.646*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings

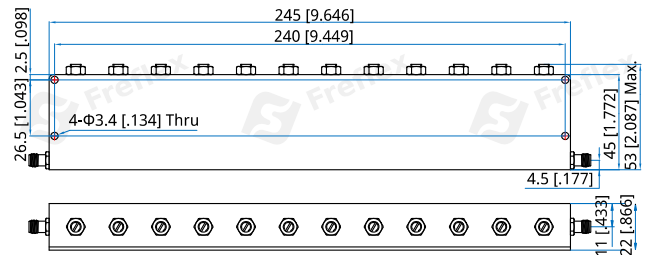

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

FRF-1710-1940-40

Customization is available upon request.