

FRF-1920-1980-60

1.92~1.98GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.895GHz 2.005~5.4GHz
Passband Insertion Loss:	1.0dB max. @DC~1.87GHz, 2.03~5.4GHz 1.7dB max. @1.87~1.895GHz, 2.005~2.03GHz
Passband VSWR:	1.5 max.
Stopband:	1.92~1.98GHz
Stopband Attenuation:	60dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*45*22mm 9.646*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

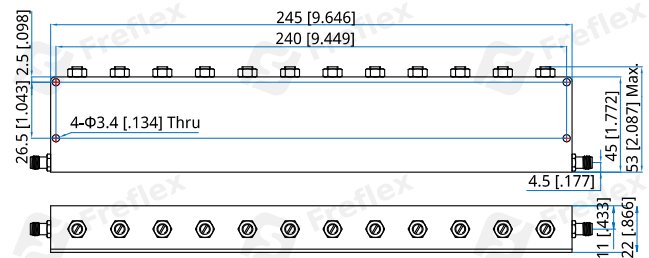

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-1920-1980-60

Customization is available upon request.