

FDO-13434-13454-13

13.434~13.454GHz, 13dBm

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	13.434~1.454GHz
Frequency Temperature Stability:	±5ppm
Output Power:	13dBm min.
Phase Noise:	-75dBc/Hz@10KHz -110dBc/Hz@100KHz -130dBc/Hz@1MHz
VSWR:	2 max.
Harmonic:	-20dBc max.
Spurious:	-80dBc max.
Voltage:	+15V ±1V(VCC)
Current:	200mA max.

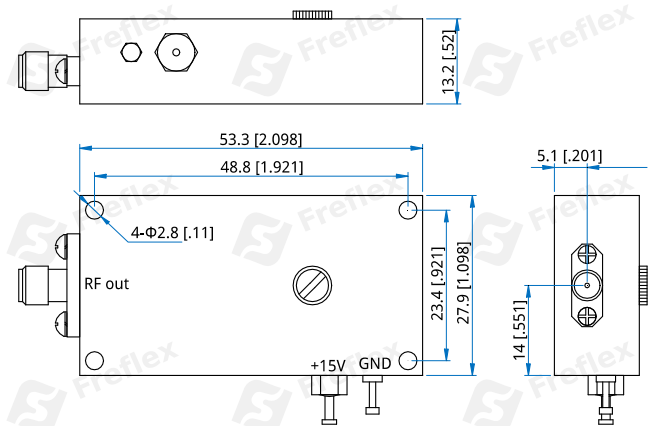
Mechanical

Size ^{*1} :	53.3*27.9*13.2mm 2.098*1.098*0.52in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDO-13434-13454-13

Customization is available upon request.